


## Solar Boiler™ Service Log

To ensure optimum performance from your Solar Boiler™, Thermo Dynamics Ltd. recommends that the system is back flushed at least every 6 months. This service log must be kept up to date. Failure to do so will render the warranty null and void.

### Back Flushing Procedure.

- Close the valve at the bottom of the solar storage tank near the Flexhose™ that connects the tank to the Solar Boiler™, shown in the diagram in the diagram.
- Connect a hose to the drain bib at the bottom of the solar storage tank, and place the free end in a drain.
- Open the drain bib and allow water to flow for a few minutes. This will remove residue from the heat exchanger and hoses.

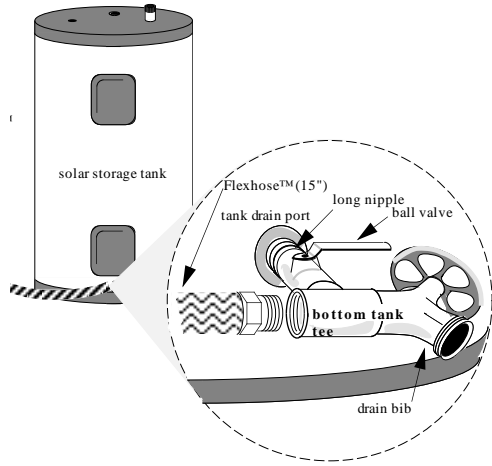

<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		


For more system maintenance procedures, please refer to your installation manual, or contact your local dealer, or Thermo Dynamics Ltd. at (902) 468-1001

## Solar Boiler™ Service Log

To ensure optimum performance from your Solar Boiler™, Thermo Dynamics Ltd. recommends that the system is back flushed at least every 6 months. This service log must be kept up to date. Failure to do so will render the warranty null and void.

### Back Flushing Procedure.

- Close the valve at the bottom of the solar storage tank near the Flexhose™ that connects the tank to the Solar Boiler™, shown in the diagram in the diagram.
- Connect a hose to the drain bib at the bottom of the solar storage tank, and place the free end in a drain.
- Open the drain bib and allow water to flow for a few minutes. This will remove residue from the heat exchanger and hoses.

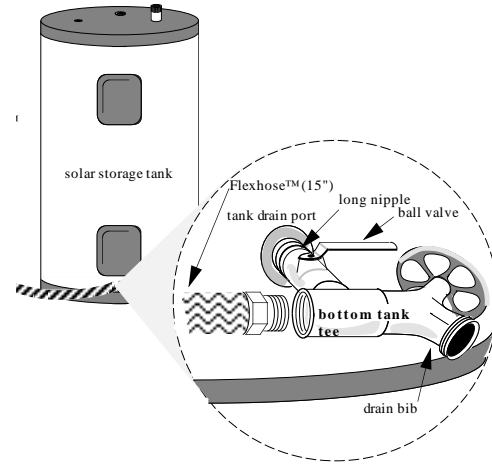

<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		
<b>Date:</b> _____	Technician _____	<input type="checkbox"/> Back Flush _____
Comments _____		

For more system maintenance procedures, please refer to your installation manual, or contact your local dealer, or Thermo Dynamics Ltd. at (902) 468-1001